


VEU MRL HOME ELEVATOR WITH 36 INCH 2 SPEED AUTOMATIC DOORS

MAXIMUM GROSS LOAD	2000 lbs (910 Kg)
CAPACITY	950 lbs (430 Kg)
MAXIMUM TRAVEL	42 ft (12.90 m)
MAXIMUM LANDINGS	6 FLOORS
MAXIMUM sq ft (sq m)	15 sq ft (1.4 sq m)

STANDARD HOISTWAY SPECIFICATIONS

(A & B ARE PROVIDED IN 2" INCREMENTS)

INSIDE CAR WIDTH (A)	INSIDE CAR DEPTH (B) (MINIMUM 44" - MAXIMUM 50")	INSIDE HOISTWAY WIDTH (C)	INSIDE HOISTWAY DEPTH (D)	RETURN (E)	INSIDE CAR AREA sq ft [sq m]
42" [1067]	50" [1270]	62" [1575]	63" [1600]	18" [457]	14.58 [1.35]
	48" [1219]		61" [1549]		14 [1.30]
	46" [1168]		59" [1499]		13.42 [1.25]
	44" [1118]		57" [1448]		12.83 [1.19]

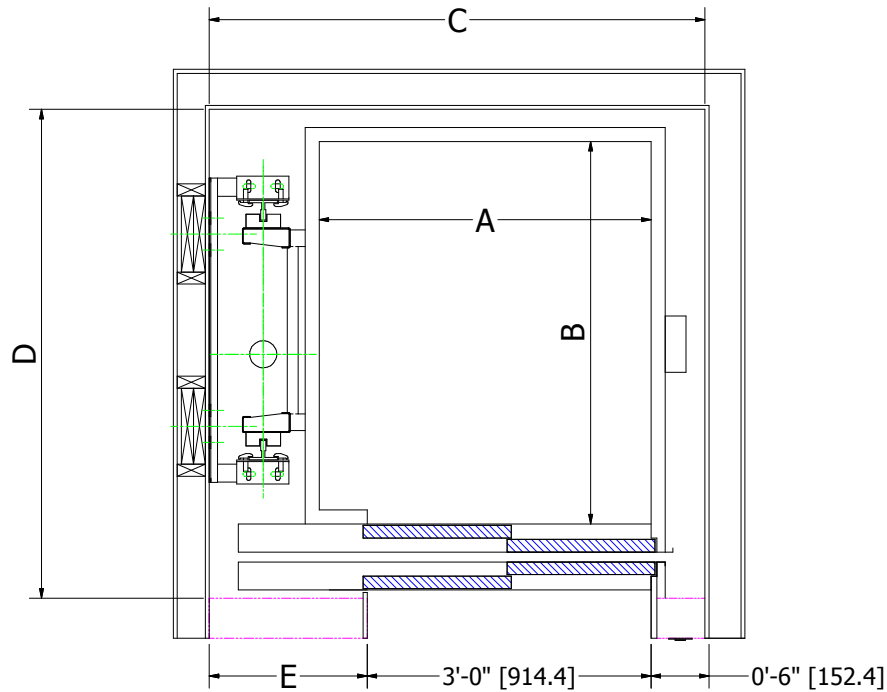

FRONT RIGHT HAND

(42 X 48 WITH 36" 2 SPEED AUTOMATIC DOOR SHOWN)
(SCALE 1:12)

DWG #: 183119

SHEET: 1 of 1